



PIPELINE REMOTE PHOSPHOR LED SYSTEM™

THE PERFECT SOFT LIGHT

From BBS Lighting, the company that pioneered remote phosphor technology in LED lighting fixtures, comes a revolutionary next step: the Pipeline System.

In a convenient cylindrical form factor in lengths of 1' 2' 3' and 4', the Pipeline remote phosphor provides ultra-high TLCI (Television Lighting Consistency Index) soft light that is controllable and dimmable with no color shift or flickering. Whether installed in an optional single or multi-lamp reflector bank, or deployed stand-alone, Pipelines are the perfect soft-light for modeling faces and illuminating backgrounds.

Among Pipeline's numerous advantages are low power draw, high light output, wide light dispersion, heatless and fan-less operation and DMX 512 controller. The Pipes are available in 3200°K, 4300°K or 5600°K color temperature outputs, and can be used in a bi-color arrangement mixing different color temperature Pipes to achieve mid-range color temperatures.

Pipeline Raw

- Ultra High TLCI: 3200°K, 4300°K or 5600°K • Optional 4-Channel Controller with 8/16-bit
- Available in 1', 2', 3' or 4' lengths DMX 512, Strobe & Manual dimming
- Flicker-free dimming from 100%-0 w/48V PSU
- Extremely high light output
- Wide 180° light dispersion



Pipeline LED System Specifications

POWER

AC Power: 100-240V 50/60Hz
 Max Power Draw: 9 Watts per foot
 Battery Operation: 14V DC

4-Banks

4'= 16000 Lumens on 160 W max draw
 3'= 12000 Lumens on 120 W max draw

Solo

2'= 2000 Lumens on 20 W max draw
 1'= 1000 Lumens on 10 W max draw

LED

Premium LED Array - 50,000 hour life
 5600°K -TLCI 95+
 4300°K -TLCI 95+
 3200°K -TLCI 95+

More than 1000 Lumens per foot

CONTROL

Manual dimming or DMX 512

DIMENSIONS


Length: 1' / 305mm
 Length: 2' / 610mm
 Length: 3' / 914mm
 Length: 4' / 1219mm
 Width: 1" / 25.4mm

THERMAL

Ambient Operating Temperature:
 -10° – 40°C / 14° – 104°F



www.BBSLighting.com
 +1 800.820.6610

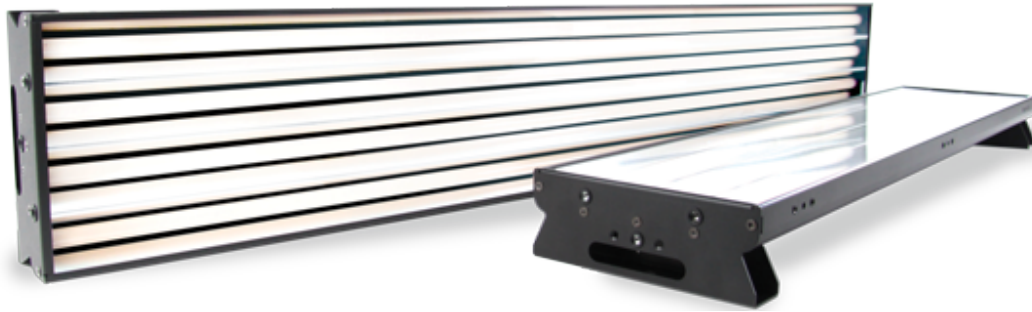


PIPELINE REMOTE PHOSPHOR LED SYSTEM™

PIPELINE SOLO 1' and 2'

Pipeline Solo 1' and 2' come with inline dimmers at the end of the cable

OPTIONAL:

- International Power Supply
- D-Tap Cable to 2.1mm
- 4 Pin XLR to 2.1mm
- 1/4- 20 Mounting Adapter
- 3/8" mounting adapter

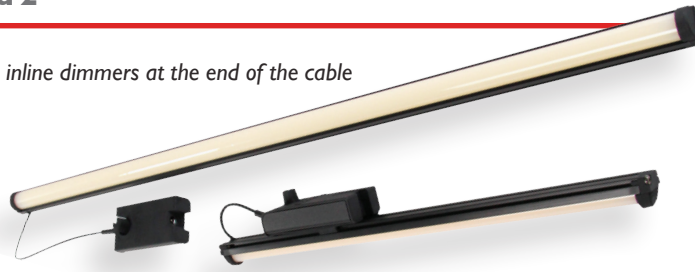

PIPELINE 4-BANK, 3' AND 4'

- Pipeline 3' & 4' Light Banks come with 4-Channel 8/16-bit DMX 512, strobe and manual dimming

OPTIONAL:

- DoPchoice Snapbags and Snapgrids



Ambient light only



Pipeline Reporter at 50%



Pipeline Reporter Kit

Printed in USA, 4/16, GCA, 500



www.BBSLighting.com
+1 800.820.6610